

# Digital Power Meter

## 多功能显示表



## HXM-96-M

Phase Wire System: 1P2W/1P3W  
3P3W/3P4W(Change of Setting)

Voltage Rated Input: L to L 100.0-480.0V AC  
L to N 57.7-277.0V AC

Current Rated Input: 1A·5A AC

Auxiliary Power: 80-264V AC/DC

## Overview


Incorporates indicator and transducer, displays 4 parameters at once through 4 bargraph and 4 digitals in a box, which is 96 mm square.

The unit can show measurement values in analog display with switches.


The unit has a RS-485 and an alarm output as standard, so you can monitor from far away.

# Outline Drawing


Outline Dimensional Drawing

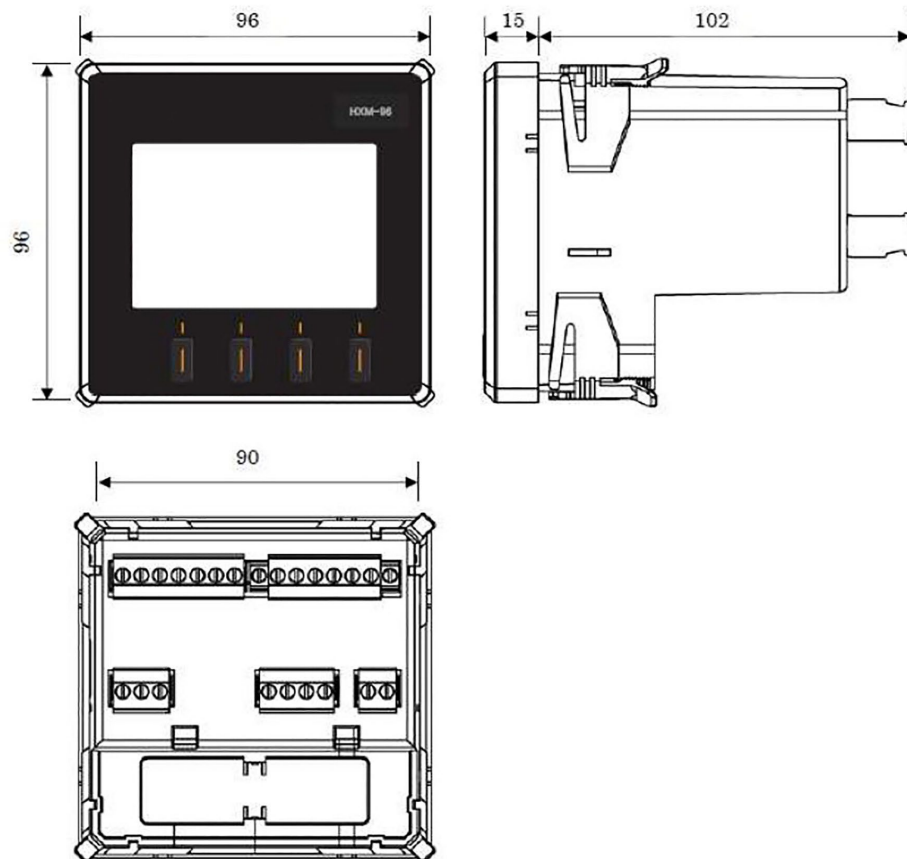

Connector Pinouts

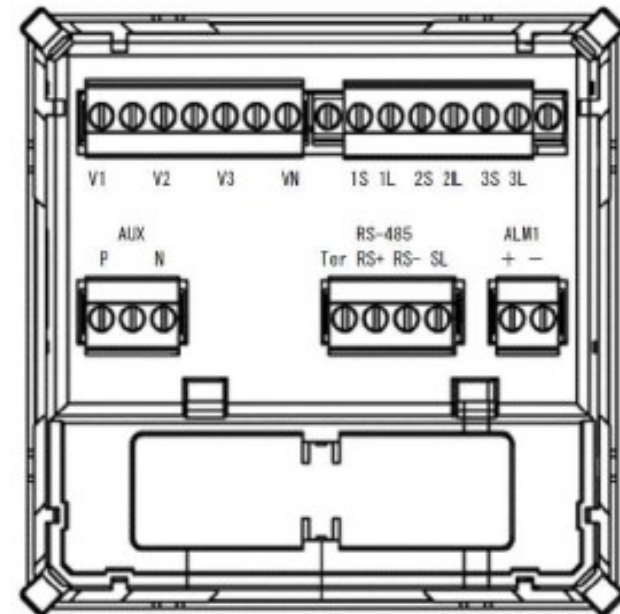

# Display

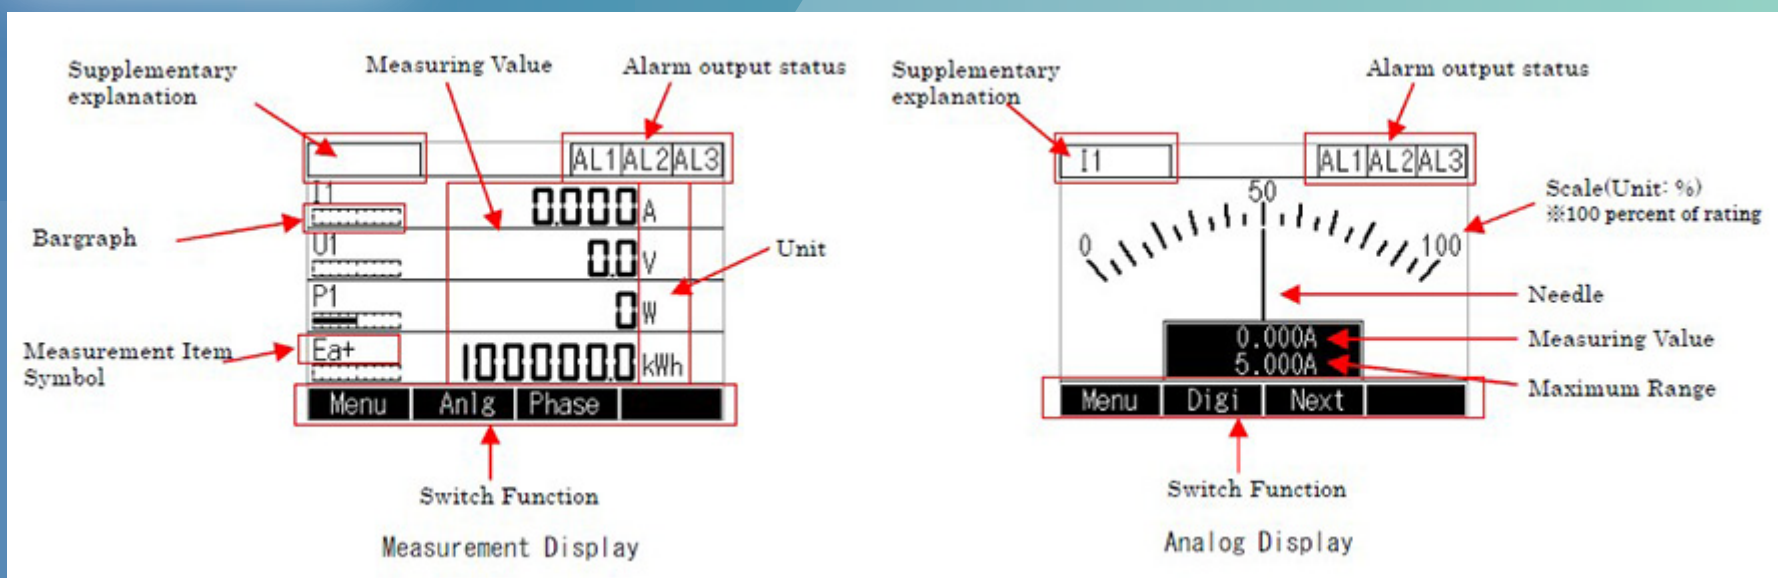

**mtt** MTT Instruments, Inc.

Osaka Branch:  
 Shin-Osaka Grand Bldg. 9F, 2-14-14 Miyahara,  
 Yodogawa-ku, Osaka 532-0003 Japan  
 TEL: +81-6-4866-5880 FAX: +81-6-4807-4550  
 URL: <https://mtt-ins.co.jp> Email: [info@mtt-ins.co.jp](mailto:info@mtt-ins.co.jp)

Distributor: